
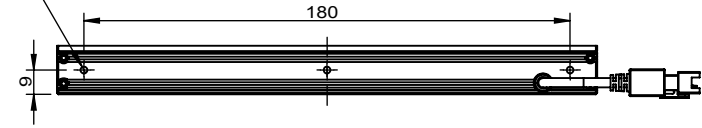



Model	Color	Voltage	Power
OPT-FLP200200-R	Red	24V	20.6W
OPT-FLP200200-G	Green	24V	21.7W
OPT-FLP200200-B	Blue	24V	26.2W
OPT-FLP200200-W	White	24V	26.2W

JST SMR-02V-B, 2 Pin or Compactible Connector		Pin	Polarity	Wire Color
	1	1	+	Red
	2	2	-	Black



6 x M3  $\nabla$  4  
Another 3 in the opposite




6 x  $\perp$  3.5  $\nabla$  1.5  
M3  $\nabla$  4

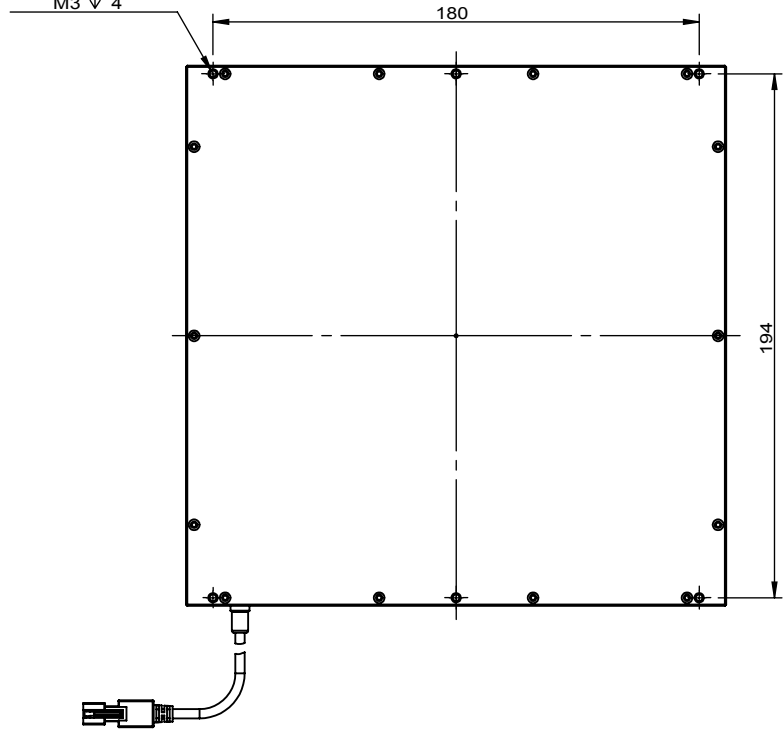

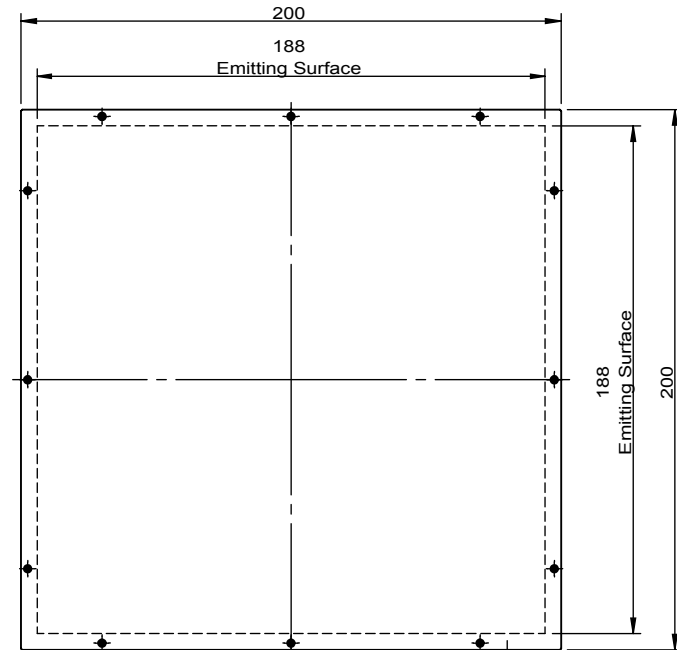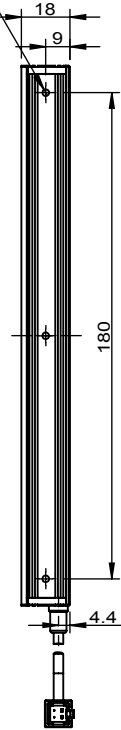

6 x M3  $\nabla$  4  
Another 3 in the opposite



Minimum Bending Radius : 20mm  
Length: 800±20mm  
Connector: JST SMR-02V-B



View Angle	Remark	Item	Signature	Date	 <b>OPT MACHINE VISION</b>
	Advised Controller: OPT-DPA2024E	Drawing			
Standard Difference		Design			
		Check			
		Approve			
IT14		Paper Size	A <sub>4</sub>		<b>OPT-FLP200200-X</b>
	Revised Date	2018-08-30	Scale	1:2.8	
Drawing Code	KFBZ20180829KF0501	Page	1/1 Total Page	Version	V2.0

Copyright © 2011 by OPT  
All Rights Reserved